

Mono – Single Spindle Aggregate Head



Aggregate heads are used for:


- Speeding operations by combining tasks
- Reducing the number of tool changes needed
- Creating custom profiles and mortises
- Faster sizing and grooving (saw blade)

Follow these steps to place an order:


1. Determine your CNC machine spindle type.
2. Make sure the aggregate output is correct for your application.
3. Choose your outputs based on the number of spindles the aggregate head offers.

HSK63F spindle shown. HSK63E, ISO30, ISO40, BT30, and BT35 spindles are also available. Torque arms are available for other spindle types. Call for information



Output Options (for Mono and Duo):

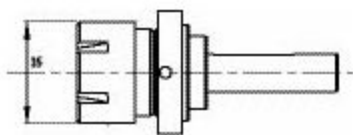

M5 - ER 25 Collet

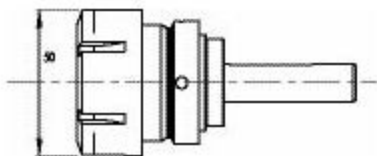

R6 - ER 32 Collet



Application	Boring, routing, and sawing
Spindle Speed Max.	10,000 RPM
Tool Speed Max.	15,000 RPM
Rotation	Aggregate can be rotated 360°
Gear Ratio	1:1.48
Spindle Direction	Same
Maximum Torque	15 ft. lbs.
Maximum Temp.	185° F
Outputs Available	M5, R6, S1, S2