TEETH: 3 MAX RPM: 14,000 HOOK: 10° SHEAR: 0° TIPS: INSERT

.505

⊥R.0204


\_\_\_\_\_R.0204

PA: N/A

.75

A.K.A. #: N/A

DWG: 4-01-4978300

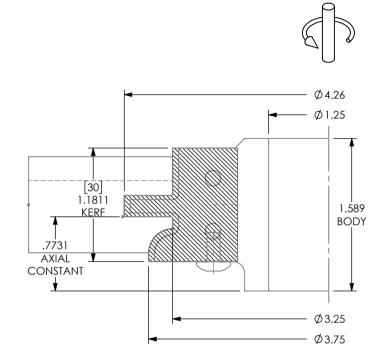

ATTN:\_\_\_\_\_\_ DATE:\_\_\_\_\_ PO#:\_\_\_\_\_

CUSTOM TOOLING MUST HAVE CUSTOMER APPROVAL PRIOR TO THE START OF MANUFACTURING. PLEASE REVIEW THIS DRAWING FOR ACCURACY, INCLUDING ROTATION, AND FAX A SIGNED AND DATED COPY. PRODUCTION WILL BEGIN UPON RECEIPT OF APPROVED DRAWING.

APPROVED BY:\_\_\_\_\_ DATE:\_\_\_\_

HALL MANUFACTURING DWG: 4-01-4978300



REV.

