


# Edge-Fluting Bits




CARBIDE TIPPED
Z2
RH


## 862

The edge-fluting bearing guided bits are quick to set up can be used for curved screens, small radius grooves, doors etc. no side fence required. Use in a handheld or table-mounted router.

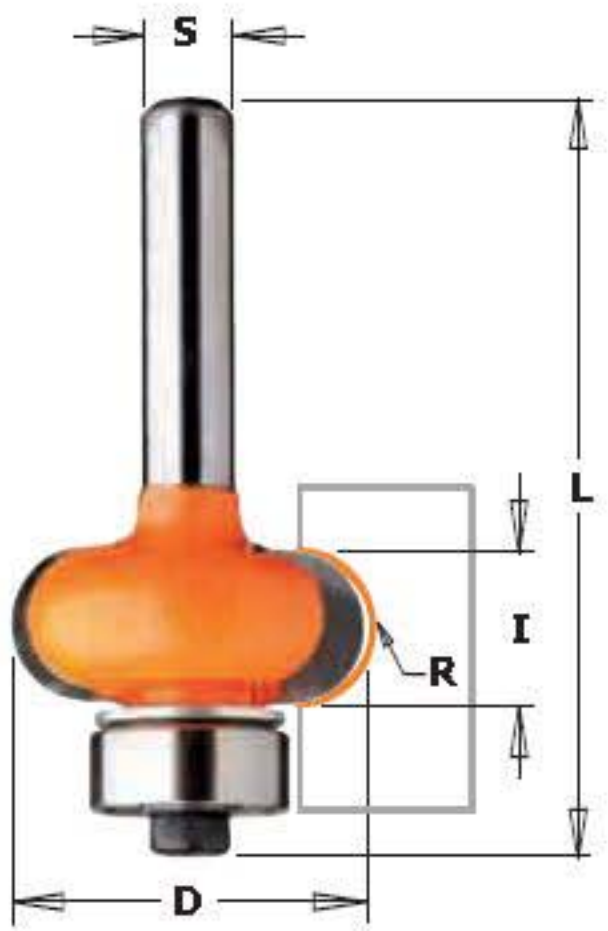

**For Top bearing version: use bearing 791.010.00 and stop collar 541.001.00 (optional)**

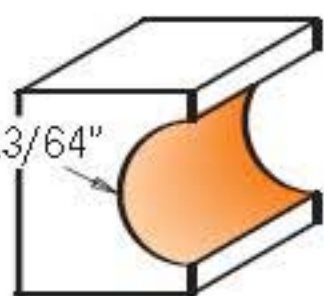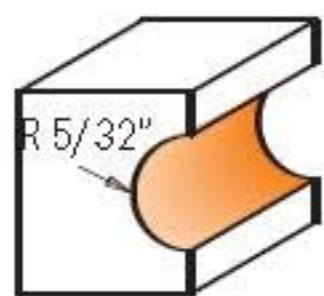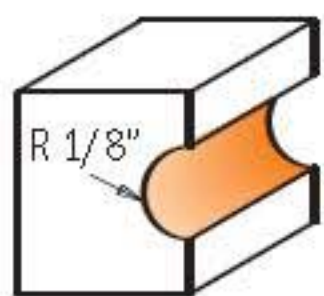

Drawings are 1:1 scale

### Spare parts

ORDER NO. 1/4" shank	R		D inches	I inches	L inches	Spare parts		
	inches	mm				Shield	Bearing	Screw TCEI
<b>862.032.11</b>	1/8	3.2	3/4	1/4	2-1/4	990.423.00	791.003.00	990.058.00
<b>862.040.11</b>	5/32	4	13/16	5/16	2-1/4	990.423.00	791.003.00	990.058.00
<b>862.050.11</b>	13/64	5	57/64	25/64	2-1/4	990.423.00	791.003.00	990.058.00