



# LU2B

## HW - LAME PER IL TAGLIO DI PANNELLI DI LEGNO E COMPOSTI T.C.T. SAWBLADES FOR CUTTING WOODEN PANELS AND COMPOSITES


RIF. LU04M - LU06M

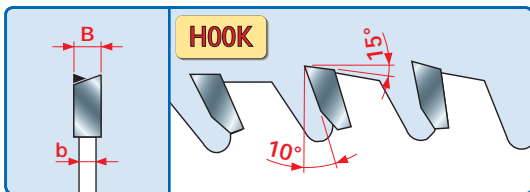

CARATTERISTICHE DEL DENTE - TOOTH'S FEATURES

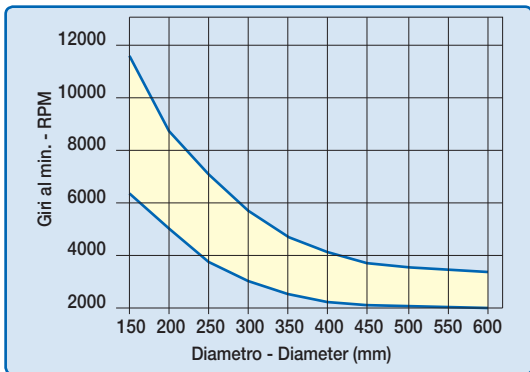

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.  
Minimum and maximum RPM based on the blade diameter.

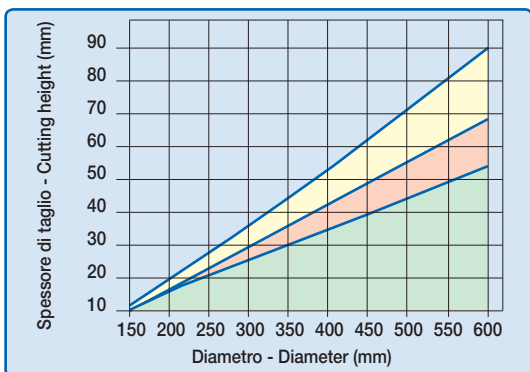

  Legno massiccio / Solid wood  
  Materiali su base legno / Wood-base materials  
  Legno stratificato / Plywood

Altezza di taglio lungo e trasverso vena massima consentita in funzione del diametro della lama.  
Maximum depth of rip and crosscut based on the blade diameter.

| D<br>mm | B<br>mm | b<br>mm | d<br>mm | Z   | FT - NL | CODICE<br>CODE |
|---------|---------|---------|---------|-----|---------|----------------|
| 150     | 3,2     | 2,2     | 30      | 36  | 2/7/42  | LU2B 0100 •    |
| 180     | 3,2     | 2,2     | 30      | 42  | 2/7/42  | LU2B 0200 •    |
| 200     | 3,2     | 2,2     | 30      | 48  | 2/7/42  | LU2B 0300 •    |
| 216     | 3,2     | 2,2     | 30      | 48  |         | LU2B 0400 •    |
| 250     | 3,2     | 2,2     | 30      | 48  | FT01    | LU2B 0500 •    |
| 250     | 3,2     | 2,2     | 30      | 60  | FT01    | LU2B 0700 •    |
| 250     | 3,2     | 2,2     | 35      | 60  |         | LU2B 0800 •    |
| 300     | 3,2     | 2,2     | 30      | 60  | FT01    | LU2B 0900 •    |
| 300     | 3,2     | 2,2     | 30      | 72  | FT01    | LU2B 1100 •    |
| 300     | 3,2     | 2,2     | 35      | 72  |         | LU2B 1200 •    |
| 315     | 3,2     | 2,2     | 30      | 72  | FT01    | LU2B 1300 •    |
| 350     | 3,5     | 2,5     | 30      | 72  | FT02    | LU2B 1400 •    |
| 350     | 3,5     | 2,5     | 30      | 84  | FT02    | LU2B 1600 •    |
| 350     | 3,5     | 2,5     | 35      | 84  |         | LU2B 2400 •    |
| 400     | 4,0     | 2,8     | 30      | 96  | 2/10/60 | LU2B 1900 •    |
| 450     | 4,4     | 3,0     | 30      | 96  | 2/10/60 | LU2B 2000 •    |
| 500     | 4,4     | 3,2     | 30      | 108 | 2/10/80 | LU2B 2100 •    |
| 550     | 4,8     | 3,5     | 30      | 120 | 2/10/80 | LU2B 2200 •    |
| 600     | 5,4     | 4,0     | 30      | 132 | 2/10/80 | LU2B 2300 •    |

FT01 = 2/7/42 + 2/9/46,4 + 2/10/60    FT02 = 2/9/46,4 + 2/10/60

- > **Impiego:** Taglio lungo e trasverso vena.
- Macchine:** Seghe circolari, macchine portatili.
- Caratteristiche:** Dentatura alterna a 15° con angolo di taglio positivo.
- Materiale:** Legni massicci teneri, duri ed esotici, pannelli in legno stratificati, truciolari grezzi.
- > **Application:** Ripping and crosscutting.
- Machines:** Circular saws, portable machines.
- Features:** ATB 15° tooth with positive cutting angle.
- Material:** Soft, hard and exotic solid wood, unprocessed chipboard and plywood.

|                                       | SUFFICIENTE<br>SUFFICIENT | BUONO<br>GOOD | OTTIMO<br>EXCELLENT |
|---------------------------------------|---------------------------|---------------|---------------------|
| LEGNO LUNGO VENA<br>RIPPING           |                           |               |                     |
| LEGNOA TRAVERSO VENA<br>CROSS CUTTING |                           |               |                     |
| COMPOSTI DI LEGNO<br>WOOD COMPOSITED  |                           |               |                     |
| LAMINATI<br>LAMINATES                 |                           |               |                     |



• DISPONIBILE A MAGAZZINO  
STOCK ITEMS

○ PROSSIMAMENTE A MAGAZZINO  
COMING SOON

□ DISPONIBILE FINO AD ESAURIMENTO SCORTE  
AVAILABLE UNTIL STOCK SELLS OUT