



LU2C

HW - LAME PER IL TAGLIO DI PANNELLI DI LEGNO E COMPOSTI T.C.T. SAWBLADES FOR CUTTING WOODEN PANELS AND COMPOSITES

Rif. LU10M - LU37M

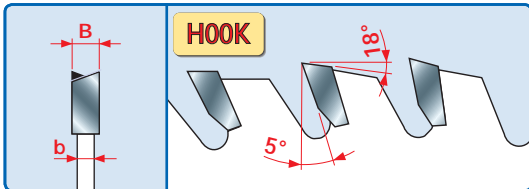


CARATTERISTICHE DEL DENTE - TOOTH'S FEATURES

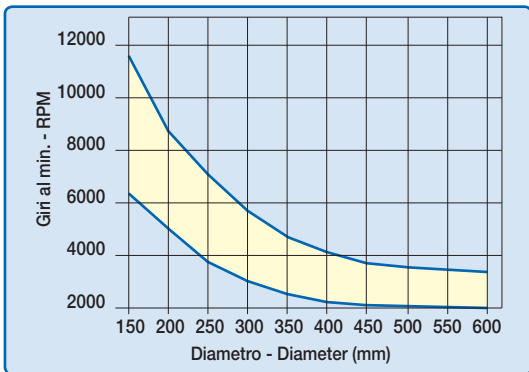

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.

Minimum and maximum RPM based on the blade diameter.

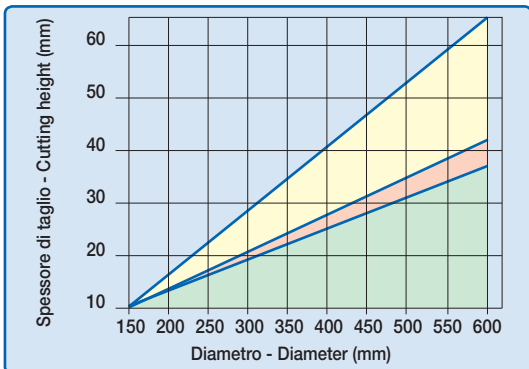

Legno massiccio
 Solid wood

Legno stratificato
 Plywood

Materiali su base legno
 Wood-base materials

Altezza di taglio traverso vena massima consentita in funzione del diametro della lama.

Maximum crosscutting depth depending on the blade diameter.

| D mm | B mm | b mm | d mm | Z | FT - NL | CODICE CODE |
|---------|---------|---------|---------|-----|---------|----------------|
| 150 | 3,2 | 2,2 | 30 | 48 | 2/7/42 | LU2C 0100 • |
| 160 | 3,2 | 2,2 | 20 | 48 | 2/6/32 | LU2C 0200 • |
| 180 | 3,2 | 2,2 | 20 | 56 | 2/6/32 | LU2C 0300 • |
| 180 | 3,2 | 2,2 | 30 | 56 | 2/7/42 | LU2C 0400 • |
| 190 | 3,2 | 2,2 | 30 | 56 | 2/7/42 | LU2C 0500 • |
| 200 | 3,2 | 2,2 | 30 | 64 | 2/7/42 | LU2C 0600 • |
| 210 | 3,2 | 2,2 | 30 | 64 | 2/7/42 | LU2C 0700 • |
| 216 | 3,2 | 2,2 | 30 | 64 | 2/7/42 | LU2C 0800 ◦ |
| 220 | 3,2 | 2,2 | 30 | 64 | 2/7/42 | LU2C 0900 • |
| 230 | 3,2 | 2,2 | 30 | 64 | 2/7/42 | LU2C 1000 • |
| 250 | 3,2 | 2,2 | 30 | 80 | FT01 | LU2C 1200 • |
| 250 | 3,2 | 2,2 | 30 | 100 | FT01 | LU2C 1300 • |
| 300 | 3,2 | 2,2 | 30 | 96 | FT01 | LU2C 1500 • |
| 300 | 3,2 | 2,2 | 35 | 96 | | LU2C 1600 • |
| 300 | 3,2 | 2,2 | 30 | 120 | FT01 | LU2C 1700 • |
| 330 | 3,2 | 2,2 | 20 | 96 | 2/6/32 | LU2C 1800 • |
| 350 | 3,5 | 2,5 | 30 | 108 | FT02 | LU2C 2000 • |
| 400 | 3,8 | 2,8 | 30 | 120 | 2/10/60 | LU2C 2100 • |
| 450 | 4,4 | 3,0 | 30 | 132 | FT02 | LU2C 2200 • |
| 500 | 4,4 | 3,2 | 30 | 144 | 2/10/80 | LU2C 2300 • |
| 550 | 4,8 | 3,5 | 30 | 156 | 2/10/80 | LU2C 2400 ◦ |
| 600 | 5,4 | 4,0 | 30 | 168 | 2/10/80 | LU2C 2500 • |

FT01 = 2/7/42 + 2/9/46,4 + 2/10/60 **FT02** = 2/9/46,4 + 2/10/60

- > **Impiego:** Taglio traverso vena.
- Macchine:** Seghe circolari, macchine portatili.
- Caratteristiche:** Dentatura alterna a 15° con angolo di taglio positivo.
- Materiale:** Legni massicci teneri, duri, esotici, truciolari, termoplastici, MDF laminati su un solo lato.
- > **Application:** Crosscutting.
- Machines:** Circular saws, portable machines.
- Features:** ATB 15° tooth with positive cutting angle.
- Material:** Soft, hard and exotic solid wood, chipboard, thermoplastic-wood composites, MDF laminated on one side.

| SUFFICIENTE SUFFICIENT | BUONO GOOD | OTTIMO EXCELLENT |
|---------------------------|---------------|---------------------|
|---------------------------|---------------|---------------------|

| | | | | |
|---|--|--|--|--|
| LEGNO TRAVESSO VENA CROSS CUTTING | | | | |
| COMPOSTI DI LEGNO WOOD COMPOSITED | | | | |
| LAMINATI LAMINATES | | | | |
| MATERIALI PLASTICI PLASTIC MATERIALS | | | | |