

LU3F

HW - LAME PER IL TAGLIO DI PANNELLI BILAMINATI T.C.T. SAWBLADES TO CUT BILAMINATED PANELS



| D mm | B mm | b mm | d mm | Z | FT - NL | CODICE CODE |
|---------|---------|---------|---------|-----|---------|----------------|
| 220 | 3,2 | 2,2 | 30 | 64 | 2/7/42 | LU3F 0100 • |
| 250 | 3,2 | 2,2 | 30 | 80 | FT01 | LU3F 0200 • |
| 300 | 3,2 | 2,2 | 30 | 96 | FT01 | LU3F 0300 • |
| 350 | 3,5 | 2,5 | 30 | 108 | FT02 | LU3F 0400 • |

FT01 = 2/7/42 + 2/9/46,4 + 2/10/60 FT02 = 2/9/46,4 + 2/10/60

> Impiego: Per la sezionatura senza l'ausilio della lama incisore di pannelli bilaminati. Particolarmente indicata nella lavorazione di pannelli rivestiti in melaminico e di materiali plastici.

Macchine: Seghe circolari, sezionatrici orizzontali, sezionatrici verticali.

Caratteristiche: Dente piano-trapezoidale con angolo di taglio negativo.


Materiale: Pannelli bilaminati, materiali plastici.

> Application: To size bilaminated panels without the employment of the scoring sawblade. In detail, it is suitable to work melamine-coated panels and plastic materials.


Machines: Circular saws, horizontal panel sizing machines, vertical panel sizing machines.

Features: Flat-triple chip tooth with negative cutting angle.


Material: Bilaminated panels, plastic materials.

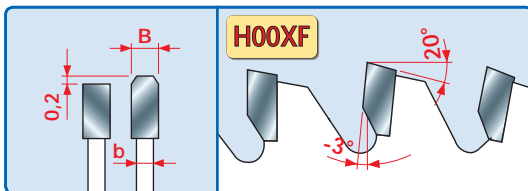

CARATTERISTICHE DEL DENTE - TOOTH'S FEATURES

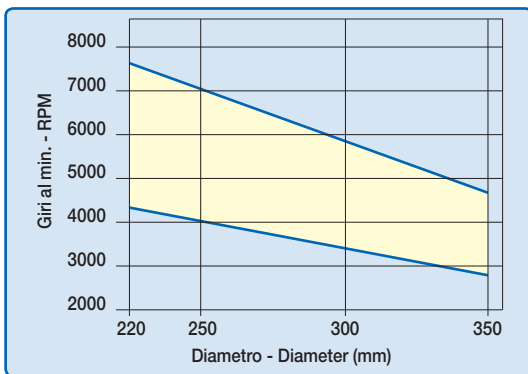

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.
Minimum and maximum RPM based on the blade diameter.

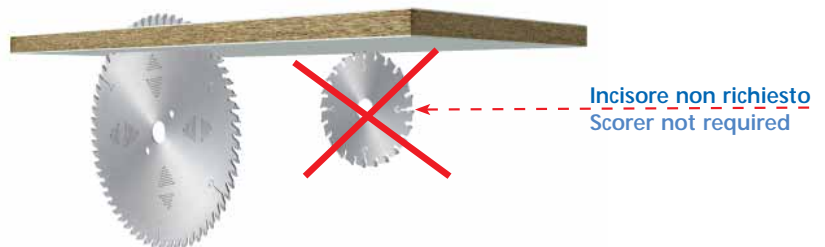

| | SUFFICIENTE SUFFICIENT | BUONO GOOD | OTTIMO EXCELLENT |
|--------------------------------------|------------------------------------|---------------|---------------------|
| COMPOSTI DI LEGNO WOOD COMPOSITED | [Progressive bar from blue to red] | | |
| LAMINATI LAMINATES | [Progressive bar from blue to red] | | |