

LU4B

HW - LAME PER IL TAGLIO DI PLASTICA E PLEXIGLAS - SP. SOTTILE T.C.T. SAWBLADES TO CUT PLASTIC MATERIALS AND PLEXIGLAS - THIN KERF



D mm	B mm	b mm	d mm	Z	FT - NL	CODICE CODE
178	1,5	1,0	25,4	80		LU4B 0500 •
203	2,0	1,4	25,4	90		LU4B 0100 •
230	2,2	1,6	25,4	100		LU4B 0200 •
250	2,2	1,6	30	100	FT01	LU4B 0300 •
255	2,2	1,6	25,4	100		LU4B 0400 •

FT01 = 2/7/42 + 2/9/46,4 + 2/10/60

> **Impiego:** Per la sezionatura in singolo di pannelli in materiale plastico e plexiglas. Lo spessore di taglio ridotto facilita l'avanzamento del pezzo da lavorare e ottimizza l'impiego su macchine a bassa potenza.

Macchine: Seghe circolari, macchine portatili.

Caratteristiche: Dentatura Piano - Alterna a 10°, con assiale a 5° e angolo di taglio positivo. La particolare forma del dente garantisce un'ottima finitura e durata di taglio.


Materiale: Materiale plastico, plexiglas.

> **Application:** To size Plexiglas and plastic material panels. The reduced cutting height makes workpiece feeding easier and optimises its employment in low-power machines.


Machines: Circular saws, portable machines.

Features: Flat - ATB 10° tooth with 5° shear angle and positive cutting angle. The specific shape of the tooth assures an excellent finishing and cutting life.

Material: Plastic materials, plexiglas.

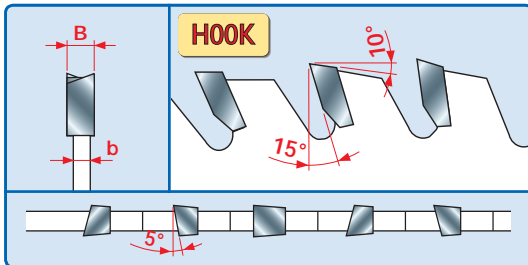

CARATTERISTICHE DEL DENTE - TOOTH'S FEATURES

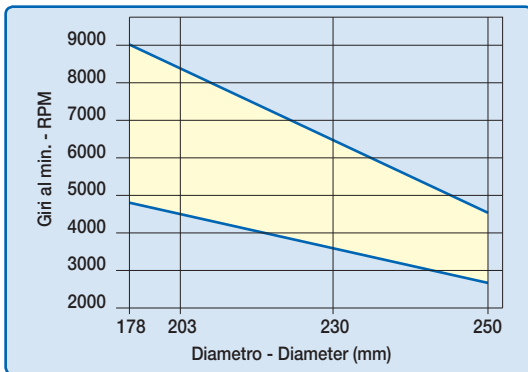

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.

Minimum and maximum RPM based on the blade diameter.

	SUFFICIENTE SUFFICIENT	BUONO GOOD	OTTIMO EXCELLENT
PLEXIGLAS PLEXIGLAS	[Progress bar showing high performance]		
MATERIALI PLASTICI PLASTIC MATERIALS	[Progress bar showing high performance]		