


Industrial General Purpose Blades

LU72M



Features TiCo™ Hi-Density Carbide General Purpose Blend For Maximum Performance

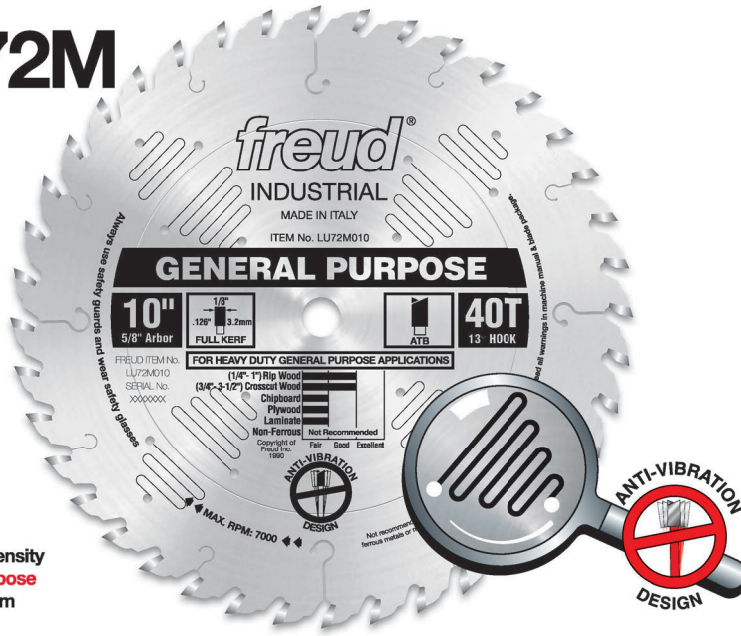

For Heavy-Duty General Purpose Applications

Application

Recommended Use & Cut Quality

- RIPS WOOD 1/4" to 1":
 - CROSSCUTS WOOD 3/4" to 3 1/2":
 - CHIP BOARD:
 - PLYWOOD:
 - LAMINATE:
 - NON-FERROUS: Not Recommended
- CUT QUALITY:** Fair → Good → Excellent
(Not recommended for ferrous metals or masonry)


Crosscutting

3/4" MIN.
3 1/2" MAX.


Ripping

1/4" MIN.
1" MAX.

This heavy-duty blade is good for crosscutting thick hardwoods and softwoods and thinner stock materials. The ideal working range is from 3/4" to 3-1/2" thick for crosscutting, and 1/4" to 1" thick for ripping. Thinner or thicker material may be cut, but some loss of surface finish may occur.



Positive Hook Angle for fast cutting and easy feeding in production applications



Heavy-Duty Thick Kerf and Plate ensure a stable, flat blade for long cutting life

Silver ICE™	Dia.	Teeth	Arbor	Kerf(K)	Plate(P)
LU72M008	8"	34 ATB	5/8"	.126	.087
LU72M009	9"	36 ATB	5/8"	.126	.087
LU72M010	10"	40 ATB	5/8"	.126	.087
LU72M012	12"	48 ATB	1"	.126	.087
LU72M014	14"	54 ATB	1"	.138	.098
LU72M016	16"	60 ATB	1"	.150	.110
LU72M018	18"	66 ATB	1"	.157	.118
LU72M020	20"	72 ATB	1"	.165	.126

• Carbide Grade Chart •

Increasing Hardness

← H30S H20S H10S **H01S** H00S H00K H00X →

Increasing Impact Strength



For best results, set your saw so that one half of a carbide tip protrudes beyond the material to be cut.