

# Industrial Glue Line Ripping Blades

## LM74M


## LM74R



No Stabilizers Needed




Features TiCo™ Hi-Density Carbide Ripping Blend For Maximum Performance

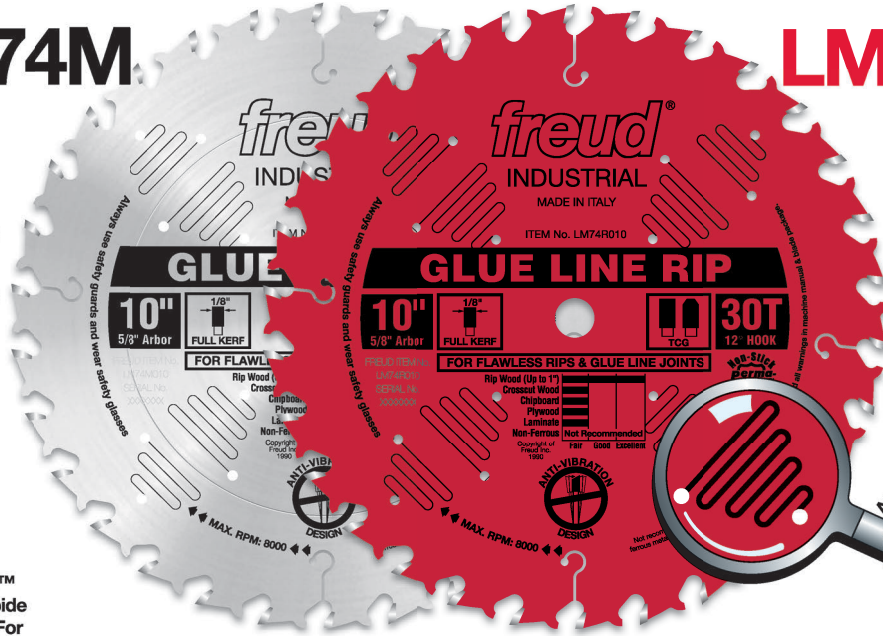

Application

### Heavy Duty Glue Line Ripping Blades For Superior Finish

#### Recommended Use & Cut Quality

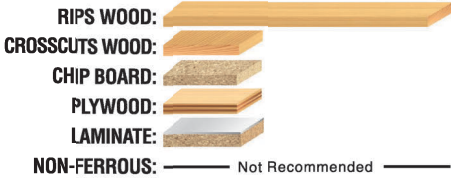


CUT QUALITY: Fair → Good → Excellent  
(Not recommended for ferrous metals or masonry)




Depth of Cut



This blade's specially designed triple chip tooth design produces extremely smooth, true surfaces for gluing and finish work. There is no need for sanding or jointing after the cut. The ideal working range is from 1/8" to 1" thick. This blade also features laser cut anti-vibration slots, practically eliminating the vibration that resonates in standard blades. With this ultimate ripping blade, there is no need for stabilizers.



Heavy-Duty Thick Kerf and Plate ensure a stable, flat blade for long cutting life



Laser-Cut Anti-Vibration Slots drastically reduce vibration and sideways movement in the cut extending blade life, and giving a crisp, swirl-free flawless finish

Silver ICE™	Perma-SHIELD®	Dia.	Teeth	Arbor	Kerf(K)	Plate(P)
LM74M008	LM74R008	8"	24 TCG	5/8"	.118	.098
LM74M010	LM74R010	10"	30 TCG	5/8"	.118	.098
LM74M012	LM74R012	12"	40 TCG	1"	.118	.098
LM74M014	LM74R014	14"	44 TCG	1"	.138	.118

• Carbide Grade Chart •

← Increasing Hardness →

← Increasing Impact Strength →

H30S H20S **H10S** H01S H00S H00K H00X



For best results, set your saw so that one half of a carbide tip protrudes beyond the material to be cut.