

# Industrial Glue Line Ripping Blades

## LM74M


## LM74R



No Stabilizers Needed




Features TiCo™ Hi-Density Carbide Ripping Blend For Maximum Performance

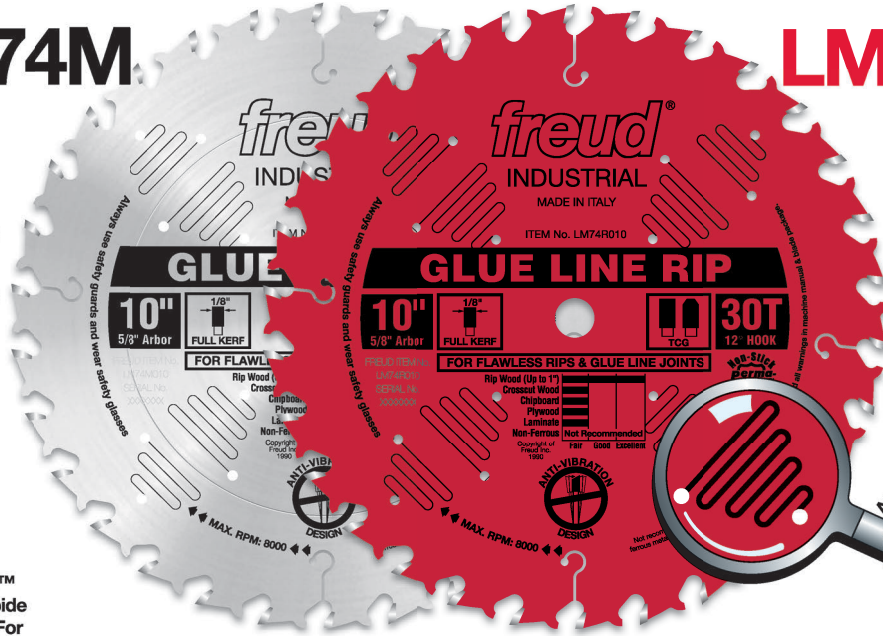

Application

### Heavy Duty Glue Line Ripping Blades For Superior Finish

#### Recommended Use & Cut Quality

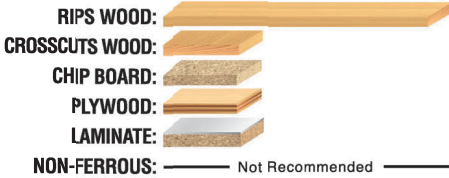


**CUT QUALITY:** Fair → Good → Excellent  
(Not recommended for ferrous metals or masonry)




Depth of Cut



This blade's specially designed triple chip tooth design produces extremely smooth, true surfaces for gluing and finish work. There is no need for sanding or jointing after the cut. The ideal working range is from 1/8" to 1" thick. This blade also features laser cut anti-vibration slots, practically eliminating the vibration that resonates in standard blades. With this ultimate ripping blade, there is no need for stabilizers.



**Heavy-Duty Thick Kerf and Plate** ensure a stable, flat blade for long cutting life



**Laser-Cut Anti-Vibration Slots** drastically reduce vibration and sideways movement in the cut extending blade life, and giving a crisp, swirl-free flawless finish

| Silver ICE™ | Perma-SHIELD® | Dia. | Teeth  | Arbor | Kerf(K) | Plate(P) |
|-------------|---------------|------|--------|-------|---------|----------|
| LM74M008    | LM74R008      | 8"   | 24 TCG | 5/8"  | .118    | .098     |
| LM74M010    | LM74R010      | 10"  | 30 TCG | 5/8"  | .118    | .098     |
| LM74M012    | LM74R012      | 12"  | 40 TCG | 1"    | .118    | .098     |
| LM74M014    | LM74R014      | 14"  | 44 TCG | 1"    | .138    | .118     |

• Carbide Grade Chart •

Increasing Hardness

← H30S H20S **H10S** H01S H00S H00K H00X →

Increasing Impact Strength



For best results, set your saw so that one half of a carbide tip protrudes beyond the material to be cut.