



LU2E

HW - LAME PER IL TAGLIO DI PANNELLI E LEGNI ESOTICI ABRASIVI T.C.T. SAWBLADES FOR CUTTING EXOTIC ABRASIVE WOOD AND PANELS

Rif. LA90M - LA91M

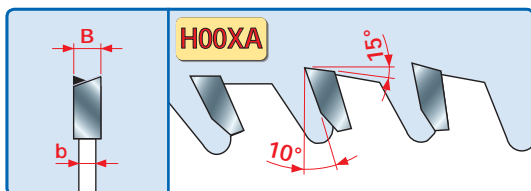

CARATTERISTICHE DEL DENTE - TOOTH'S FEATURES

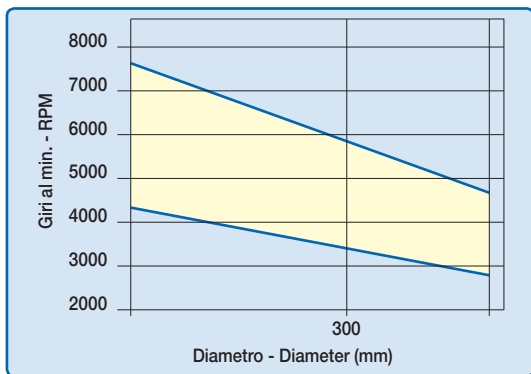

Fascia del N. giri minimo e massimo consigliati in funzione del diametro della lama.
Minimum and maximum RPM based on the blade diameter.

D mm	B mm	b mm	d mm	Z	FT - NL	CODICE CODE
300	3,2	2,2	30	60	FT01	LU2E 0200 •
300	3,2	2,2	30	72	FT01	LU2E 0400 •
350	3,5	2,5	30	72	FT02	LU2E 0500 •

FT01 = 2/7/42 + 2/9/46,4 + 2/10/60 FT02 = 2/9/46,4 + 2/10/60

- > **Impiego:** Taglio trasverso vena.
- Machine:** Seghe circolari, sezionatrici.
- Caratteristiche:** Dentatura alterna a 15° con angolo di taglio positivo.
- Materiale:** Legni teneri e duri pregiati, fino a mm 50 truciolare, MDF laminati su un solo lato, fino a mm 30.
- > **Application:** Crosscutting.
- Machines:** Circular saws, panel-sizing machines.
- Features:** ATB 15° tooth with positive cutting angle.
- Material:** Good quality soft and hard wood, up to mm 50 chipboard, MDF laminated on one side, up to mm 30.

	SUFFICIENTE SUFFICIENT	BUONO GOOD	OTTIMO EXCELLENT
LEGNO TRAVESSO VENA CROSS CUTTING	[Progressive bar from blue to red]		
COMPOSTI DI LEGNO WOOD COMPOSITED	[Progressive bar from blue to red]		
LAMINATI LAMINATES	[Progressive bar from blue to red]		
MATERIALI PLASTICI PLASTIC MATERIALS	[Progressive bar from blue to red]		