


Industrial Thin Kerf Sliding Compound Miter Saw Blades

LU91M

LU91R

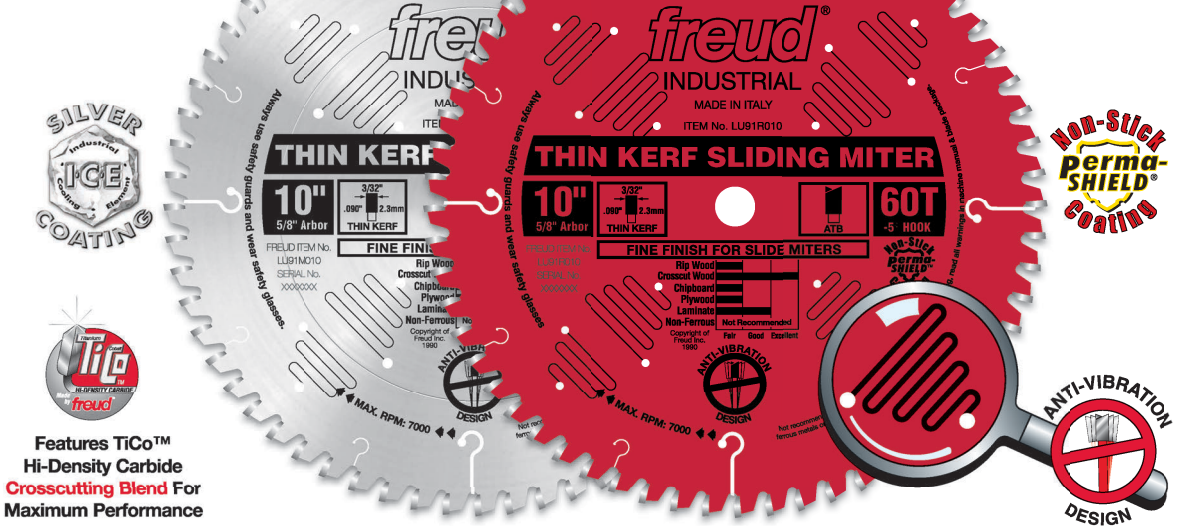

Features TiCo™
Hi-Density Carbide
Crosscutting Blend For
Maximum Performance

Fine Finish Blades For Sliding Miter & Radial Arm Saws

Recommended Use & Cut Quality

RIPS WOOD:

CROSSCUTS WOOD:

CHIP BOARD:

PLYWOOD:

LAMINATE:

NON-FERROUS: — Not Recommended —

CUT QUALITY: Fair → Good → Excellent →
(Not recommended for ferrous metals or masonry)




Depth of Cut



This thin kerf industrial blade provides a superior finish cut with sliding compound miter saws. The 5° negative hook angle helps prevent the blade from being too aggressive and pushes the work piece down and towards the fence. Thin kerf blades remove less material than standard carbide blades, thus requiring less horsepower to produce equally good results.

Application



Negative Hook Angle minimizes climbing for better control



Thin Kerf requires less power and allows for faster feed rate

Silver ICE™	Perma-SHIELD®	Dia.	Teeth	Arbor	Kerf(K)	Plate(P)
LU91M008	LU91R008	8 1/2"	48 ATB	5/8"	.090	.071
LU91M010	LU91R010	10"	60 ATB	5/8"	.090	.071
LU91M012	LU91R012	12"	72 ATB	1"	.090	.071

• Carbide Grade Chart •

← Increasing Hardness →
← Increasing Impact Strength →

H30S H20S **H10S** H01S H00S H00K H00X

For safety and best results when using a miter saw, securely clamp the material before cutting.

Tips
Techniques

freud®

Crosscutting Blades

SAW BLADES